

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
3 February 2005 (03.02.2005)

PCT

(10) International Publication Number  
**WO 2005/009238 A1**

(51) International Patent Classification<sup>7</sup>: **A61B 5/15**

(21) International Application Number:  
PCT/PL2003/000132

(22) International Filing Date: 1 December 2003 (01.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
P.361490 29 July 2003 (29.07.2003) PL

(71) Applicant (for all designated States except US): HTL  
STREFA Spółka z o.o. [PL/PL]; ul. Adamówek 7,  
PL-95-035 Ozorków (PL).

(71) Applicant (for US only): RUTYNOWSKI, Włodzimierz  
[PL/PL]; ul. Piwarskiego 11/9, PL-00-770 Warszawa (PL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PT, RO, RU, SC, SD,  
SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG,  
US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PUNCTURING DEVICE

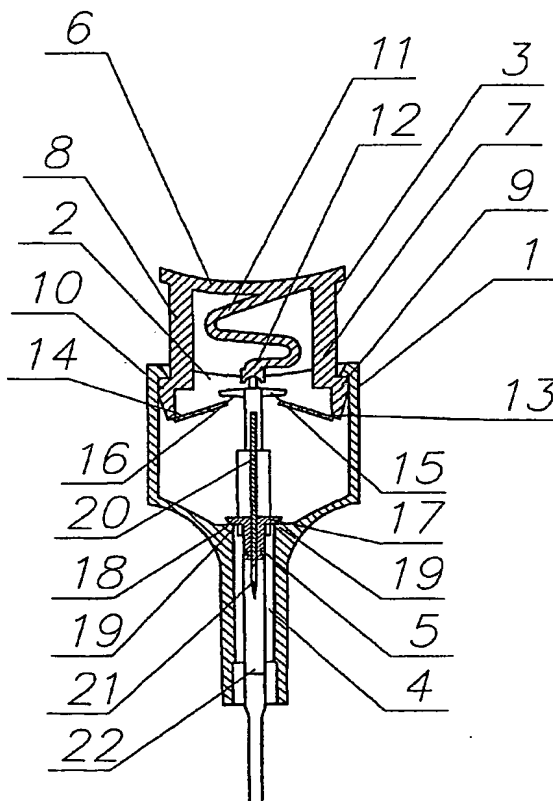

(57) Abstract: The device is built of a housing (1), wherein a push button (3) is positioned, and the puncturing needle (5), wherein the push button (3) has arms (7, 8) to guide the push button (3) inside the housing (1), and a driving spring (11), one end of which is linked to the push button (3), and the other end drives the puncturing needle (5), and the puncturing needle (5) has breakable wings (17, 18), which rest against the breaking edge (19) of the housing (1). The device has moreover two return springs (13, 14), each of which is connected to one of the arms (7, 8) of the push button (3), and two side juts (15, 16), each of which is positioned between one of the return springs (13, 14) and the other end of the driving spring (11).

WO 2005/009238 A1